
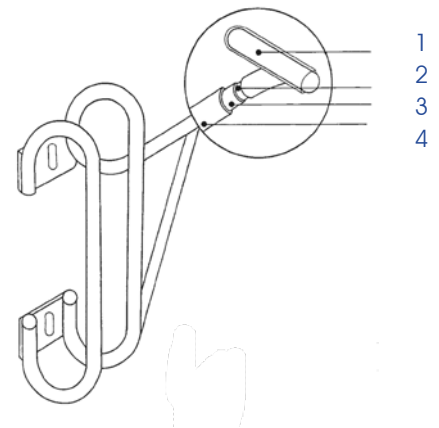
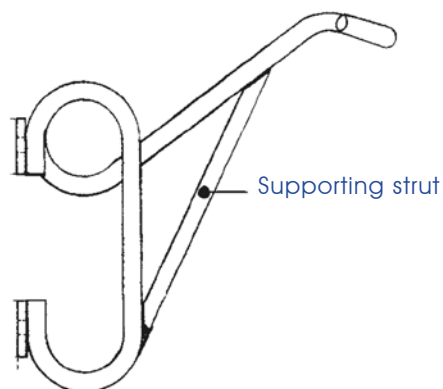
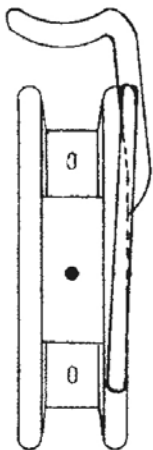


Josta Wall Rack


- Small space requirement of the construction
- The bicycles can be stored vertically or horizontally
- Well maintained and organized parking of bicycles
- Bicycles are stable
- Allows points to complete the bike frame
- Available for mounting in 90, 60, 45 and 22 degrees
- Easy cleaning and keeping the shelves clean
- Unobtrusive by visually appealing and adaptable forms
- Can be retrofitted with safety clips
- Attractive price
- Available in all RAL colours
- Will be delivered ready for installation
- Advantage: cost-effective installation

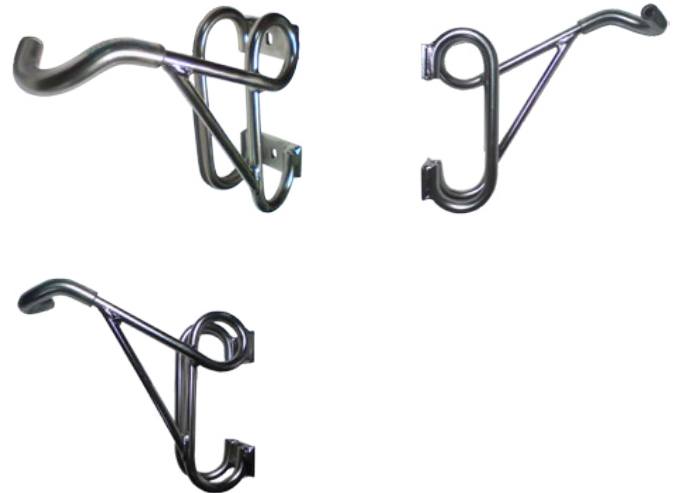

1. Plastic tube to protect rims
2. Round steel
3. Galvanization
4. powder coated in RAL colours

The Josta Wall Rack can be supplied to mount at 90 or 60 degrees to the wall adapter blocks can be provided to give angles of 45 or 22 degrees.


Mounting at 90°



The standard way of mounting the Wall Rack is at 90 degrees to the wall.

This allows the centres of the racks to be spaced at 425mm and means that a standard bike will project about 1100mm from the wall.

Mounting at 60°




A variant of the Wall Rack allow bikes to be parked at 60 degrees to the wall. This means the centres of the racks have be spaced at least 500mm apart.

Using 60 degree Wall Racks reduces the projection of standard bike to approximately about 950mm from the wall.

The Rack can be supplied so that the angle faces the left or the right.

Mounting at 45°




Using an adapter block allows the standard Wall Rack to be mounted at 45 degrees to the wall. In this configuration the centres of the Wall racks must be spaced at 600mm.

At this angle the projection of a standard bike is reduced to approximately 600mm.

The rack can be install to face the left or the right by turning the adapter block over.

Mounting at 22°

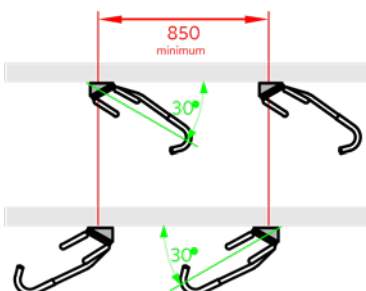


Using an adapter block allows the 60 degree Wall Rack to be mounted at 30 degrees to the wall. In this configuration the centres of the Wall racks must be spaced at 850mm.

At this angle the projection of a standard bike is reduced to approximately 550mm. The rack can be supplied so that the angle faces the left or the right.

Particularly suitable is this form for garages and cellars.

The Josta Wall Rack can be installed to park bicycles in either horizontal or vertical position or in high and low positions. For both positions, the shelves should be vertically offset so that the wheels can be parked without tangling or cables tangling. The recommended minimum distance between the holders is 425mm.

Horizontal Parking

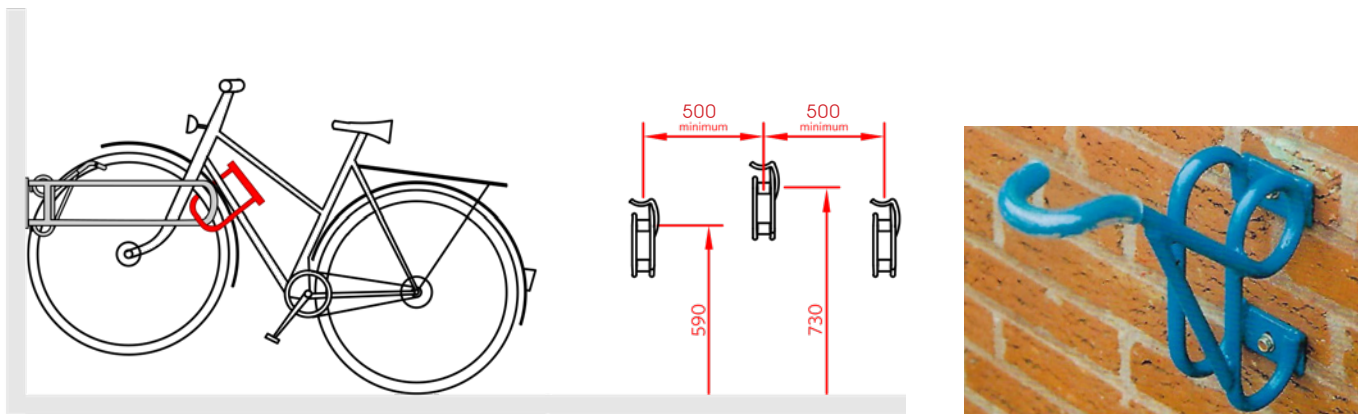

Security bar options



The Josta wall bracket can optionally be supplied with a safety bar. This can be installed on the wall or on the construction.

Vertical Parking




The Josta wall mount is a functional wall mount that holds the bike securely in place.

An (optional) safety bar provides an additional locking point for the bicycle frame.

The holder can be installed in places where little space is available or on which it is not possible to attach fastening systems to the ground.

The result: A solution with little space for the proper and thoughtful parking of bicycles.


Rack with security bar

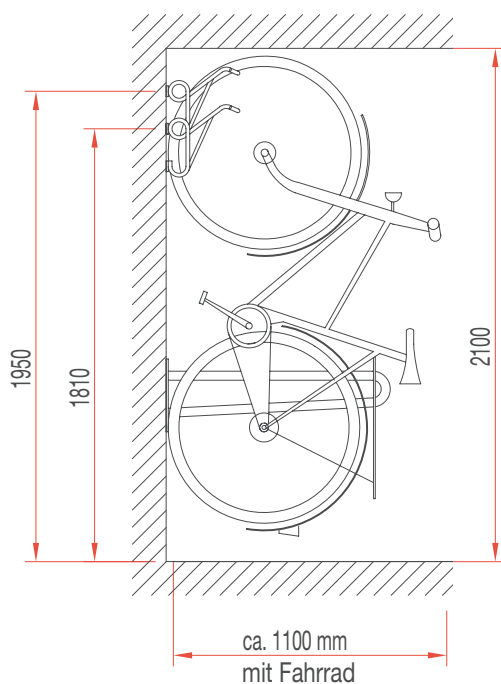


JOSTA wall racks with frame works



One-sided wall rack

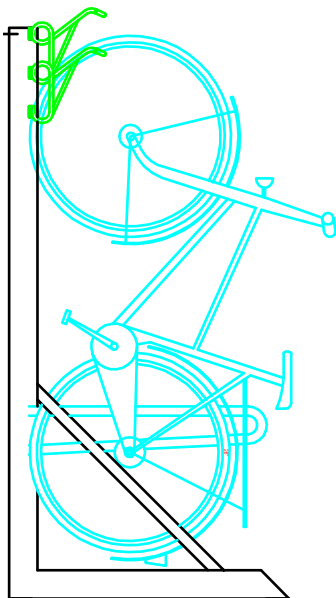

Two-sided wall rack

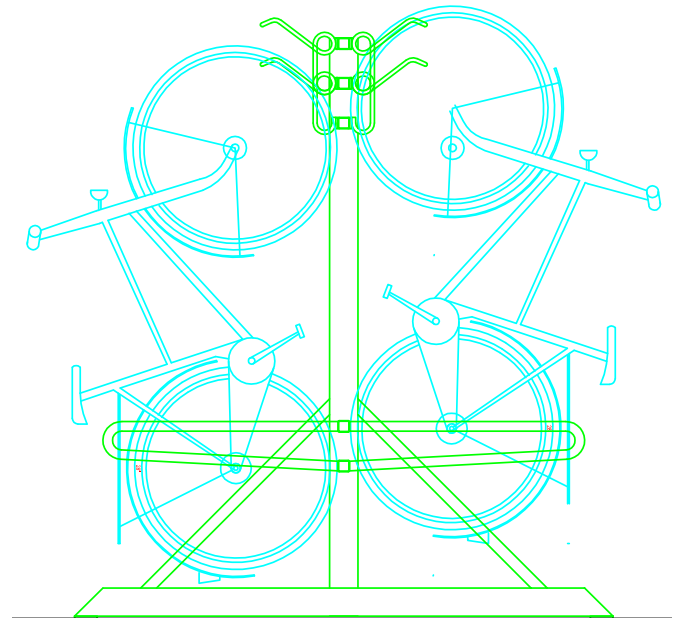

Options

- with security bar
- vertical position
- horizontal position

Usage



High-mounting with the Double-Parker



For private and public facilities



Powder coated in most standard RAL colours



Can also be used on trains

Contact

JOSTA Technik GmbH
Buldernweg 50
48163 Münster
Deutschland

Tel: + 49 (0) 251 97 43 37 40
E-Mail: josta@josta.de
Web: www.josta.de